

Video to DVI Scaler Box ID #391



Operation Manual

Introduction

ID# 391 Video to DVI Scaler Box is designed to convert Composite and S-Video to a variety of computer and HDTV resolutions.


It handles video input from TV systems of NTSC, Pal TV standards.

ID# 391 Video to DVI Scaler Box has many great features to enhance video performance and is ideal for use in professional large screen presentation.

Features

- Motion adaptive 3D Y/C separation comb filter (for composite video input)
- 3D (frame based) Motion adaptive YNR/CNR noise reduction (for Y/C video input)
- Advanced 3D Motion adaptive deinterlace
- Automatic 2 : 2/3 : 2 film mode detection
- Supports 50Hz to 60Hz frame rate conversion
- Video Quality Improvement:
 - DCT1 (Digital chroma transient improve)
 - DLT1 (Digital luminance transient Improve)
 - Black level extension
- Average picture level (APL), Automatic contrast limiter (ACL) function support
- OSD menu for picture quality adjustment
- Built in 8-bit DAC for RGB or YPbPr output
- Front Panel and IR remote control
- Automatic NTSC/Pal/SECAM video format detection and switching

Operation Controls and Functions

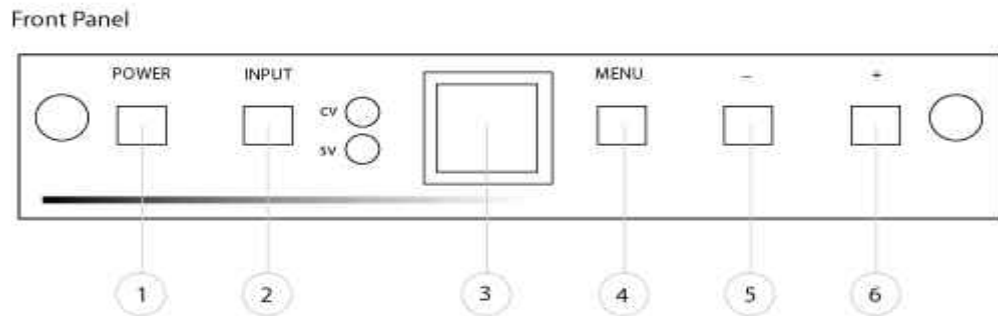

1. Power button and LED indicator:

Press the button once to power on the unit, press again to power off. When the unit is powered on, one of the LEDs will illuminate depending on your last selection of input source before power off. The factory default setting for the input is CV (Composite Video). The Green LED illuminates when CV is selected. The yellow LED illuminates when S-Video is selected.

2. Input select button:

Press the button to select your desired input source between composite video and S-Video

3. IR Sensor:

Infrad remote control sensor

4. Menu/Enter:


This button serves two purposes.

- press the button to bring up the OSD main control menu as show in the “OSD Operation” section.
- To act as a “enter” key to enter sub menu of your selected item or adjust the value of the selected item.

5/6. +/- Button:

Press the button to move up or down the tick “V” to your desired parameter. Or after a parameter is selected, the button can be used to alter the value of your selected parameter.

Rear Panel

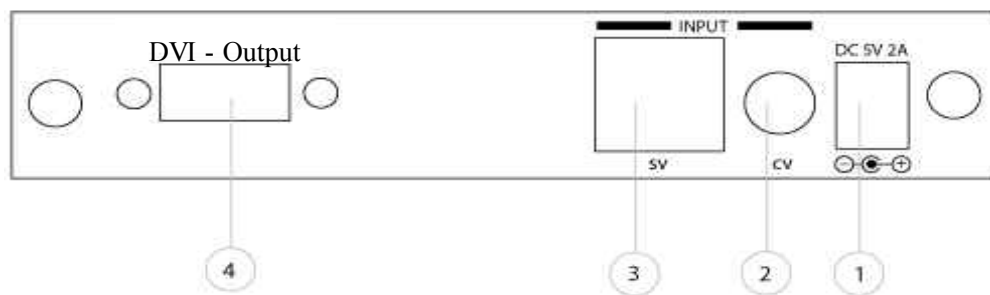

1. DC Power Jack:

5V 2A DC power input

2. Composite Video:

Use a Composite video cable to connect the composite video output of the source equipment to this composite video (CV) input of the scaler.

3. S-Video:

Use a S-Video cable to connect the S-Video output of the source equipment to this S-Video input on the back of the video scaler. S-Video provides improved performance over composite video and is recommended over composite

4. DVI Output:

ID #391 can output a variety of PC and HDTV progressive resolutions, in both digital and analog format through DVI-I connector.

Digital output: Connect ID #391's digital DVI output to the DVI input of your TV/display unit using a DVI to DVI cable .

Analog output: If you are to use ID #391's analog output to connect to the analog input of your PC or HDTV, you need to use a DVI to VGA adaptor to pull out analog signal from the DVI-I connector . The DVI to VGA adaptor is then connect to the VGA input of your display monitor through a VGA cable if output is PC resolution, or connect to the YPbPr input of your HDTV through a VGA to YPbPr/3 RCA adaptor cable if output is HDTV resolution.

Note: **DVI to VGA adaptor is not included in the standard package, and has to order separately.**

Output Format

a. The format of digital DVI output is digital RGB for all resolutions.

PC (RGBHV)	HDTV (RGBHV)
VGA -RGB 640X480 60 Hz	1080i -RGB 1920X1080 60 Hz
SVGA -RGB 800X600 60 Hz	720p -RGB 1280X720 60 Hz
XGA -RGB 1024X768 60 Hz	576p -RGB 720X576 50 Hz
WXGA-RGB 1280X768 60 Hz	480p -RGB 720X480 60 Hz
SXGA -RGB 1280X1024 60 Hz	

b. The format for analog PC output is RGB and for analog HD output is YPbPr.

PC (RGBHV)	HDTV (YPbPr)
VGA -RGB 640X480 60 Hz	1080i -YPbPr 1920X1080 60 Hz
SVGA -RGB 800X600 60 Hz	720p -YPbPr 1280X720 60 Hz
XGA -RGB 1024X768 60 Hz	576p -YPbPr 720X576 50 Hz
WXGA-RGB 1280X768 60 Hz	480p -YPbPr 720X480 60 Hz
SXGA -RGB 1280X1024 60 Hz	

OSD Control

After powering on the unit, press the menu button to bring up the main menu page as below:

Main Menu
V Picture adj.
Output Setup
Exit

Use +,- to move the tick“V” to your desired parameter, then press MENU/Enter to enter into sub-menu of your selected parameter.

Picture Adjustment

When the Picture Adjust is selected a sub menu as below appears.

	Default	Range
Bright	16	1-31
V Contrast	16	1-31
Colour	16	1-31
Tint	16	1-31
Sharp	05	1-19
Default	OK	
Exit		

Use +,- to move the tick“V” to your desired adjust item, press the Menu/Enter to confirm your selection.

At this point, the selected parameter will turn red, and you can use +,- to increase or decrease the value of the parameter.

When adjustment is complete, press “Menu” to leave the parameter. Move the tick “V” to “EXIT”, then press Menu/Enter to Exit.

Output Setup

When Output setup is selected a sub menu as below appears.

Output Setup
V Timing XGA
Exit

Press the “MENU/ENTER” button to enter into output timing select mode.

Press +,- to toggle through a variety of output resolutions as below.

Once your desired resolution is selected, press the menu/enter button to enter the resolution.


	Resolution	Vertical Rate
VGA	640x480	60Hz

	Resolution	Vertical Rate
SVGA	800x600	60Hz
XGA	1024x768	60Hz
WXGA	1280x768	60Hz
SXGA	1280x1024	60Hz
480p	720x480	60Hz
576p	720x576	50Hz
720p	1280x720	60Hz
1080i	1920x1080	60Hz

Note: 1. All output resolutions except 576p have 60Hz vertical rate, the 576p resolution has 50Hz vertical rate.

DVI Pin Configuration


DVI-Integrated(DVI-1): Supports both analog and digital connections to the display. This 29-pin connector can carry single or dual-link all-digital video/data signals on 24 pins and uses 5 pins to carry analog video/data signals and ground.

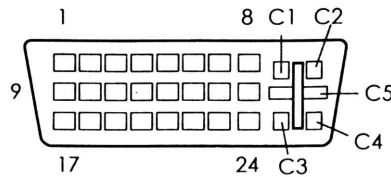

Combined Analog and Digital Connector Pin Assignments					
Pin	Signal Assignment	Pin	Signal Assignment	Pin	Signal Assignment
1	T.M.D.S Data2-	9	T.M.D.S Data 1-	17	T.M.D.S Data0-
2	T.M.D.S. Data2+	10	T.M.D.S. Data 1+	18	T.M.D.S. Data0+
3	T.M.D.S. Data2 Shield	11	T.M.D.S. Data Shield	19	T.M.D.S. Data0 Shield
4	N.C.	12	N.C.	20	N.C.
5	N.C.	13	N.C.	21	N.C.
6	DDC Clock	14	+5V Power	22	T.M.D.S. Clock Shield
7	DDC Data	15	Ground (return for +5V, Hsync, and Vsync)	23	T.M.D.S. Clock+
8	Analog Vertical Sync	16	Hot Plug Detect	24	T.M.D.S. Clock-
C1	Analog Red	C2	Analog Green	C3	Analog Blue
C4	Analog Horizontal Sync	C5	Analog Ground(Analog R,G,&B return)		

Remote Control

1. **Display:** Press the button to display input source and output resolution on the screen.
2. **Power:** Power ON/OFF button.
3. **VGA~1080i:** Press the buttons to select your desired output resolution.
4. **Picture:** Press the button to enter picture adjust submenu. Use +,- button to move cursor (V) up/down to your desired parameter, press "Picture" again to confirm.
5. **+/-:** Press the buttons to move up/down the cursor (V) to your desired parameter, or press to increase/decrease the setting value.
6. **Reset:** Press the button to reset all setting back to factory default value.
7. **Exit:** To exit OSD.
8. **Video:** Press the button to select composite video input.
9. **SVideo:** Press the button to select SVideo input.

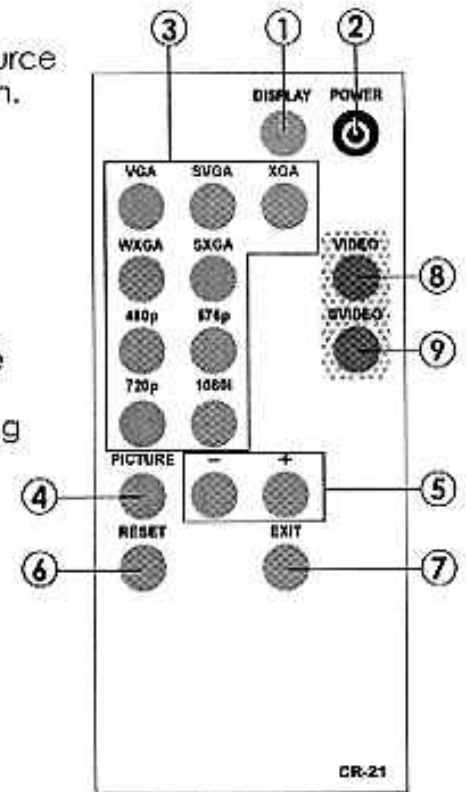

Specifications

Input signal levels	Video@ 1 Vp-p, 75 ohm, Y@ 1 Vp-p, 75 ohm Color@ 0.7 Vp-p 75 ohm
Output Fomat	Digital RGB
Output Connector	HD 15 Female
Output Singnal	Bit stream
Weight	400 grams
Dimensions	125(W) x 123(D) x 30(H) mm


Output Signal Specifications

PC Resolutions	Vert Rate	Scan Type	Format	
			Digital out Pin 1-24	Analog out Pin C 1-05
VGA 640 X 480	60 Hz	Progressive	RGB	RGB

SVGA 800 X600 XGA	60 Hz	progressive	RGB	RGB
1024X768 WXGA	60 Hz	Progressive	RGB	RGB
1280X768 SXGA	60 Hz	Progressive	RGB	RGB
1280X1024	60 Hz	Progressive	RGB	RGB
HDTV Resolutions	Vert Rate	Scan Type		
480p 720 x 480	60 Hz	Progressive	RGB	YPbPr
576p 720 x 576	50 Hz	Progressive	RGB	YPbPr
720p 1280 x 720	60 Hz	Progressive	RGB	YPbPr
1080i	60 Hz	Interlaced	RGB	YPbPr
1920x1080				

Installation

a. Digital Out: Connect to your TV through digital DVI interface

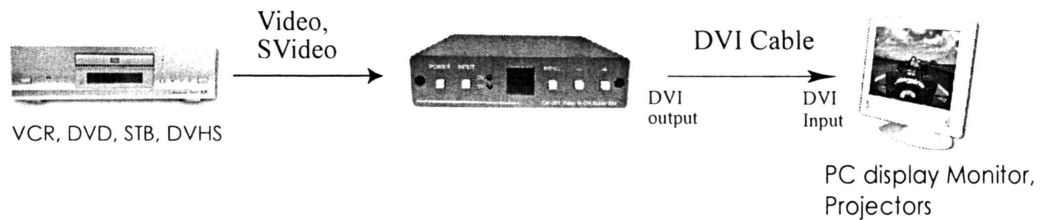

b. Analog Out: Connect to your TV through VGA or component interface in case your TV has no DVI input

