HDMI Video Receiver over Cat5 Cable - 150m ID# 540



Operation Manual




Introduction

HDMI Video Receiver over Cat5 Cable - 150m is the receiver (Rx) unit of HDMI over CAT5 Tx/Rx solution, works with ID #542: HDMI Video Transmitter over Cat5 Cable - 50m to 250m (the transmitter), can extend HDMI signal through CAT-5 cables for a distance up to 150 meters. The installation of HDMI Over CAT5 is easy and quick, simply place ID #542: HDMI Video Transmitter over Cat5 Cable - 50m to 250m next to your HDTV source such as a DVD player, then place HDMI Video Receiver over Cat5 Cable - 150m next to your display, and get all necessary cables connected to complete and enjoy.

Features

- 1. Compliant with HDMI 1.2, HDCP 1.1 and DVI 1.0 specifications.
- 2. Supports CAT-5/CAT-5E/CAT-6 cables of variable types.
- **3.** Supports high definition input up to 1080P, output resolution follows input.
- **4.** Easy to install and simple to operate.


Operating Functions and Controls Front Panel

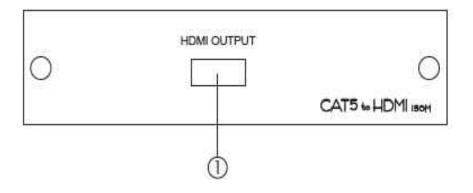

1. HDMI OUTPUT:

Connect the HDMI output port to the HDMI input of your display.

Rear Panel

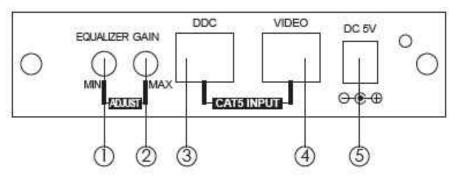



1. DDC INPUT:

1. EQUALIZER:

Use this switch to adjust signal enhancement over long distance.

2. GAIN:

Use this switch to adjust brightness.

3. DDC INPUT:

Connect the DDC input to the DDC output of the transmitter unit using CAT-5/CAT-5E/CAT-6 cable.

Note: For advanced user only, if it's known that the DDC or HDCP data are not required for the source and the display, you can use a single CAT-5 cable for the VIDEO connection only.

4. VIDEO INPUT:

Connect the VIDEO input to the VIDEO output of the transmitter unit using CAT-5/CAT-5E/CAT-6 cable.

5. Power:

Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.

Specifications

1. Supported resolutions: HDMI - 480i/480p, 576i/576p, 720P@50/60Hz,

1080i@50/60Hz, 1080p@50/60Hz

2. Input: 1 CAT-5 input for VIDEO, 1 CAT-5 input for

DDC

3. Output: 1 HDMI female port
4. Power: 5V DC power supply
5. Dimensions: 123(W) x 125(D) x 30(H)mm

6. Weight: 700g



Connection and Installation

