

Digital Optical Audio Switcher - **ID# 617**



Operation Manual

Introduction

Digital Optical Audio Switcher designed for the signal selection from two digital optical inputs to one input, using Toslink (optical fiber) cables.

The unit has two separate Toslink (optical fiber) Input Ports. This allows you to connect your devices such as DVD Players, Blu-Ray players and Audio amplifiers to the unit, and output to your connected audio equipment via Toslink cable. You can easily switch between the selected Input device by using the Input Selection switch on the side panel of the unit.


The Toslink optical fiber cables connected to both ends of the unit can run up to 5 meters while still providing reliable and lossless audio signal transmission. The unit is extremely compact and easy to install. Recommended for either home or professional audio switching.

Features

- Supports S/PDIF standard of digital audio transmission.
- Supports uncompressed 2-channel LPCM (Linear Pulse Code Modulation) audio signal.
- Supports compressed 2-channel and multi-channel Dolby and DTS audio signal.
- Provides electromagnetic-noise-free transmission.
- Easy to install and simple to operate.


Operating Functions and Controls

Front Panel

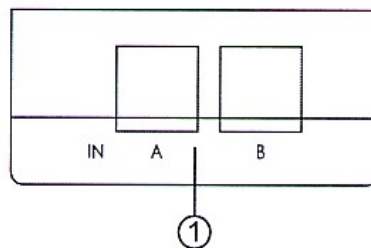


1. TOSLink (Optical Fiber) Input Ports A and B: Connect the TOSLink input ports to the TOSLink output port of audio equipments such as audio amplifier, AV receiver or DVD player.

Rear Panel

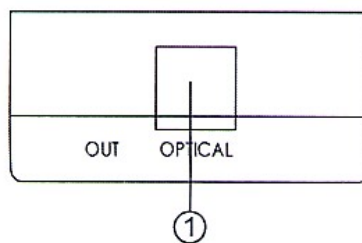


1. TOSLink (Optical Fiber) Output Port: Connect the TOSLink output port to the TOSLink input port of audio equipment such as audio amplifier and AV receiver.

Side Panel

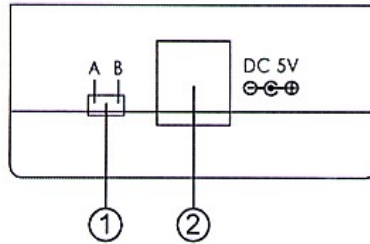

1. Input Selection: Use this mini switcher to select from 2 input ports A and B.
2. Plug 5V DC power supply into the unit and connect the adaptor to AC wall outlet.

Installation

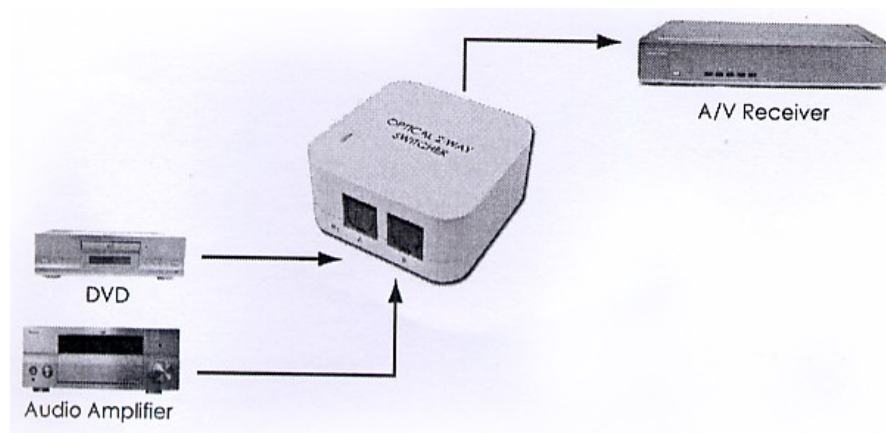

Specifications

- **Input:** 2 x TOSLink (Optical Fiber)
- **Output:** 1 x TOSLink (Optical Fiber)
- **Power:** 5V/0.36-0.5A DC (US/EU standards, CE/FCC/UL certified)
- **Dimension:** 46(W) x 45.5(D) x 23.5(H)
- **Weight:** 22g (adaptor not included)
- **Chassis Material:** Plastic
- **Silk Skin Color:** White
- **Operating Temperature:** Operating from 0°C - 48°C