

HDMI over CAT Cable Wall Plate Transmitter w/ 48V PoH - # 15492



Operation Manual

Introduction

This HDBaseT 2.0 Transmitter can send uncompressed UHD video and audio to a compatible Receiver over a single Cat.5e/6/7 cable up to 100m. It has the added benefit of extending control and communication signals through the built-in Ethernet, USB, RS-232 and IR ports. Independent external digital and analog audio transmission capability gives users the extra convenience of additional audio connections.

This unit's system supports connecting any standard USB 2.0 host to the Transmitter, enabling the extension of the USB connection to up to 2 USB ports located on the Receiver, allowing it to act like a USB hub.

The integrated 48V PoH (Power over HDBaseT) support provides power to the Transmitter (PD) from the Receiver (PSE), eliminating the need for a separate power supply for the Receiver. The 2 gang US wallplate mechanical design allows for flexibility in mounting locations, saving space and making your presentation space orderly and tidy.

Applications

- Home theater extension and control
- Lecture hall display and control
- Showroom display and control
- Meeting room presentation and control
- Classroom display and control

Features

- Supports the HDBaseT 2.0 specification over a single Cat.6/7 cable up to 100m/328ft and Cat.5e cable up to 90m/295ft
- HDBaseT 5Play™ convergence: High-Definition (HD) Video and Audio, 100BaseT Ethernet, 48V PoH, and Control (Bi-directional IR/ RS-232 pass-through)
- Transmitter (PD) is powered by 48V PoH from the Receiver (PSE)
- HDMI with 3D & 4K@60Hz (YUV 4:2:0) support, DVI 1.0 compatible
- HDCP 2.2 compliant
- 1×USB 2.0 Type B ports
- Supports pass-through of HD audio formats: LPCM 2.0/5.1/7.1, Bitstream, and HD Bitstream
- Supports optical audio sampling rates up to 48kHz
- Supports external analog and digital audio extension including support for ARC (Audio Return Channel)
- Supports RS-232 baud rates from 110~115200bps
- 2 gang US wallplate mechanical design




System Requirements

- HDMI input source equipment such as media players, video game consoles, PCs or set-top boxes.
- HDMI receiving equipment such as HDTVs, monitors or audio amplifiers.
- The use of “Premium High Speed HDMI” cables is highly recommended.
- High quality Cat.5e/6/7 cables (Cat.6 or better is recommended).

Operation Controls and

Front Panel

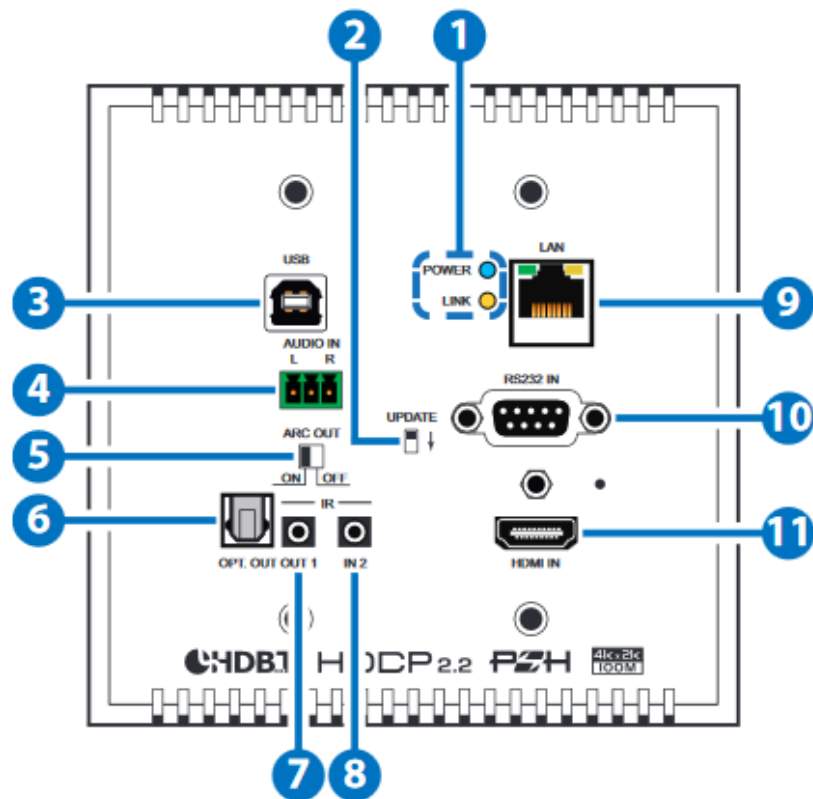

Functions

1. POWER LED:

This LED will illuminate when the device is receiving power.

2. UPDATE:

This is reserved for firmware update use only. During normal operation the dipswitch should be set to the right.

3. USB:

Connect to a PC or Laptop to extend the USB data connection to the Receiver's USB ports.

4. AUDIO IN:

Connect to the stereo analog output of a device such as a CD player or PC to extend it to the Receiver's AUDIO OUT L/R port.

5. ARC OUT ON/OFF:

Enables or disables support for ARC (Audio Return Channel) signals from the HDMI device connected to the Receiver. When switched to ON the ARC audio will be routed to both the HDMI input as well as the OPT. OUT port. When switched OFF no ARC audio will be passed.

Note: When ARC is enabled the maximum supported HDMI cable length may vary. It is suggested to use cables under 2 meters long to ensure the best audio quality.

6. OPT. OUT:

Connect to an audio receiver or powered speaker set to reproduce the audio signal from the Receiver's OPT. IN port.

7. IR OUT 1:

Connect to the provided IR Blaster to transmit IR signals to devices within direct line-of-sight of the IR Blaster.

8. IR IN 2:

Connect to the provided IR Extender to extend the IR control range of remotely located devices. Ensure that the remote being used is within direct line-of-sight of the IR Extender.

9. LAN:

Connect to an Ethernet supporting device or to your local network as appropriate. The yellow LED will illuminate to indicate a successful LAN connection between the Transmitter and Receiver and will blink to indicate a data transmission. The green LED will illuminate when the connected Ethernet speed is 100Mbit/s.


10. RS-232 IN:

Connect to a PC, laptop or other serial control device for the extension of RS-232 signals to the Receiver.

11. HDMI IN:

Connect to HDMI source equipment such as a media player, game console or set-top box.


Rear Panel

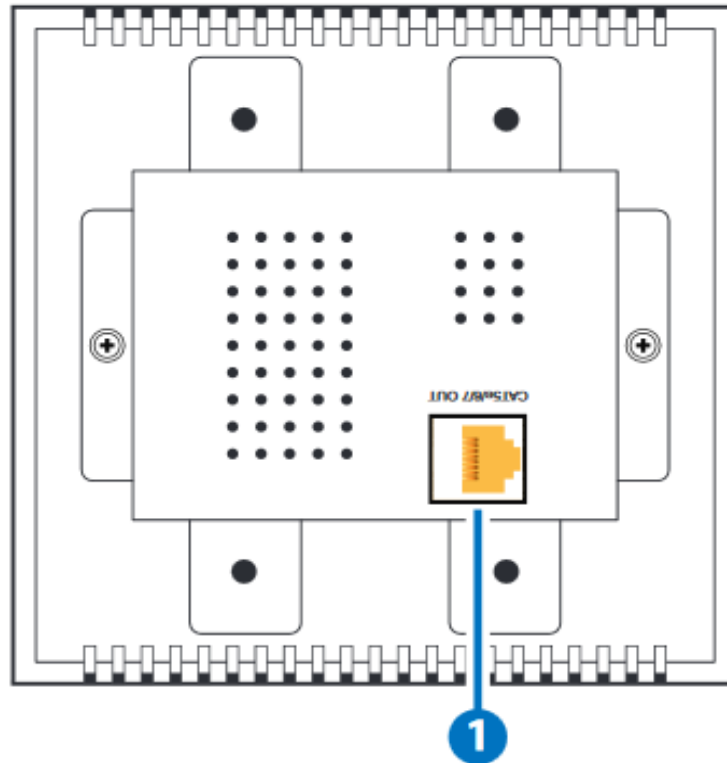

1. CAT5e/6/7 OUT:

Connect to the Receiver unit with a single Cat.5e/6/7 cable for transmission of all data signals. The yellow LED will illuminate to indicate a successful data connection between the Transmitter and Receiver. If the yellow LED blinks irregularly it indicates a data link error. The green LED will illuminate to indicate when PoH is active.

IR Cable Pin Assignment

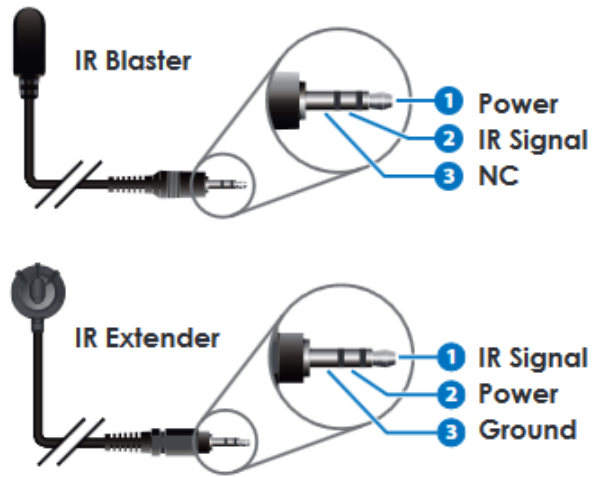

Specifications

Video Bandwidth	340MHz/10.2Gbps
Input Ports	1×HDMI, 1×USB 2.0 (Type B), 1×Stereo Audio (Terminal Block), 1×LAN (RJ45), 1×IR Extender (3.5mm), 1×RS-232 (9-pin D-sub)
Output Ports	1×Cat.5e/6/7, 1×Optical Audio (TOSLINK), 1×IR Blaster (3.5mm)
Supported Resolutions	480i@60Hz - 4K@60Hz (4:2:0, 8-bit) VGA@60Hz - WUXGA@60Hz (RB)
HDMI Cable Length	10m (1080p@60Hz, 12-bit) 5m (4K@60Hz, 4:2:0, 8-bit)
Cat.5e/6 Cable Length	100m (1080p@60Hz, 12-bit) 90m (4K@60Hz, 4:2:0, 8-bit)
Cat.6a/7 Cable Length	100m (1080p@60Hz, 12-bit) 100m (4K@60Hz, 4:2:0, 8-bit)
IR Frequency	30 - 50kHz (30 - 60kHz under ideal conditions)
Baud Rate	Up to 115200bps
ESD Protection	Human Body Model: ±12kV (Air Discharge) ±8kV (Contact Discharge)
Dimensions	125mm×127mm×41.8mm (W×H×D)
Weight	260g
Chassis Material	Metal
Silkscreen Color	Black
Operating Temperature	0°C - 40°C/32°F - 104°F
Storage Temperature	-20°C - 60°C/-4°F - 140°F
Relative Humidity	20 - 90% RH (Non-condensing)
Power Consumption	16.72 W

Connection Diagram

