

CM-392-Video to HDMI Scaler Box ID#481



Operation Manual


Introduction

CM-392-Video to HDMI Scaler Box is designed to convert Composite and S-Video to Digital HDMI in a variety of HDTV resolutions. It handles video input from TV systems of NTSC, Pal standards. CM-392-Video to HDMI Scaler Box has many great features to enhance video performance and is ideal for use in professional large screen presentation.

Features

- Motion adaptive 3D Y/C separation comb filter (for composite video input)
- 3D (frame based) Motion adaptive YNR/CNR noise reduction (for Y/C video input)
- Advanced 3D Motion adaptive deinterlace
- Automatic 2 : 2/3 : 2 film mode detection
- Supports 50Hz to 60Hz frame rate conversion
- Video Quality Improvement:
 - DCT1 (Digital chroma transient improve)
 - DLT1 (Digital luminance transient Improve)
 - Black level extention
- Average picture level (APL), Automatic contrast limiter (ACL) function support
- OSD menu for picture quality adjustment
- Built in 8-bit DAC for RGB output
- Front Panel and IR remote control
- Automatic NTSC/Pal video format detection and switching

Operation Controls and Functions

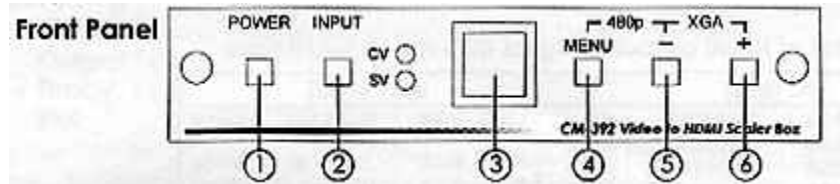

1. Power button and LED indicator:

Press the button once to power on the unit, press again to power off.

When the unit is powered on, one of the LEDs will illuminate depending on your last selection of input source before power off.

The factory default setting for the input is CV (Composite Video).

The Green LED illuminates when CV is selected.

The yellow LED illuminates when S-Video is selected.

2. Input select button:

Press the button to select your desired input source between composite video and S-Video

3. IR Sensor:

Infrared remote control sensor

4. Menu/Enter:

this button serves two purposes.

a. press the button to bring up the OSD main control menu as show in the “OSD Operation” section.


b. To act as a “enter” key to enter sub menu of your selected item or adjust the value of the selected item.

5/6. +/- Button:

Press the button to move up or down the tick “V” to your desired parameter. Or after a parameter is selected, the button can be used to alter the value of your selected parameter.

Note:

Once out of range, you can press “MENU” and “-” buttons together for over 5 seconds to go back to the HD factory default setting 480i. Or press “+” and “-” for over 5 seconds to go back to PC factory default setting XGA

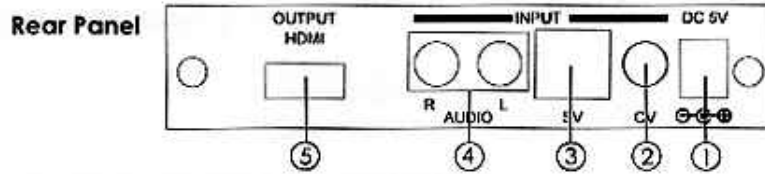

1. DC Power Jack:

5V 2A DC power input

2. Composite Video:

Use a Composite video cable to connect the composite video output of the source equipment to this composite video (CV) input on the back of the scaler.

1. S-Video:

Use a S-Video cable to connect the S-Video output of the source equipment to this S-Video input on the back of the scaler. S-Video provides improved performance over composite video and is recommended over composite

3. Audio Input Jack:

Analog L/R stereo format

4. HDMI Output:

The CM-392 can output a variety of LCD and HDTV progressive resolutions, through HDMI connector.

Digital Output:

Connect CM-392's digital HDMI output to the HDMI input of your TV/display unit using a HDMI to HDMI cable

Note:

The CM-392's 1080i resolution can be displayed on most monitors, but may not work with some HDTVs due to this 1080i output is 960x 540p @37MHz clock rate which is half the standard 1080i clock rate.

Output Format

The format of HDMI output is digital RGB for all resolutions

PC (RGB)			HDTV (RGB)		
VGA -RGB	640X480	60 Hz	1080i -RGB [pseudo]	960x540p *	60 Hz
SVGA -RGB	800X600	60 Hz	720p -RGB	1280X720	60 Hz
XGA -RGB	1024X768	60 Hz	576p -RGB	720X576	50 Hz
WXGA -RGB	1280X768	60 Hz	480p -RGB	720X480	60 Hz
SXGA -RGB	1280X1024	60 Hz			

* The standard 1080i resolution is 1920 x1080i with sampling rate at 74 MHz. CM-392's 1080i output is 960x540p which is half of the standard resolution, therefore may be not be accepted by some of the HDTVs.

OSD Control

After powering on the unit, press the menu button to bring up the main menu page as below:

Main Menu
V Picture adj.
Output Setup
Exit

Use +,- to move the tick“V” to your desired parameter, then press MENU/Enter to enter into sub-menu of your selected parameter.

Picture Adjustment

When the Picture Adjust is selected a sub menu as below appears.

	Default	Range
Bright	16	1-31
V Contrast	16	1-31
Colour	16	1-31
Tint	16	1-31
Sharp	05	1-19
Default	OK	
Exit		

Use +,- to move the tick“V” to your desired adjust item, press the Menu/Enter to confirm your selection.

At this point, the selected parameter will turn red, and you can use +,- to increase or decrease the value of the parameter.

When adjustment is complete, press “Menu” to leave the parameter. Move the tick “V” to “EXIT”, then press Menu/Enter to Exit.

Output Setup

When Output Setup is selected a submenu as below appears:


Output Setup
√ Timing XGA
Exit

Press the " MENU/ENTER" button to enter into output timing select mode.
Press +,- to toggle through a variety of output resolutions as below.
Once your desired resolution is selected, press the menu/enter to enter the resolution.

	Resolution	Vertical rate
VGA	640x480	60Hz
SVGA	800x600	60Hz
XGA	1024x768	60Hz
WXGA	1280x768	60Hz
5XGA	1280x1024	60Hz
480p	720x480	60Hz
576p	720x576	50Hz
720p	1280x720	60Hz
1080i <small>(pseudo)</small>	960x540p*	60Hz

Note: All output resolutions except 576p have 60Hz vertical rate, the 576p resolution has 50Hz vertical rate.


HDMI Pin Configuration

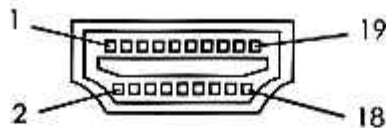

Pin#	Function Assignment	Pin#	Function Assignment
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	Reserved (N.C. on device)
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

Remote Control

1. **Display:** Press the button to display input source and output resolution on the screen.
2. **Power:** Power ON/OFF button.
3. **VGA~1080i:** Press the buttons to select your desired output resolution.
4. **Picture:** Press the button to enter picture adjust submenu. Use +,- button to move cursor (V) up/down to your desired parameter, press "Picture" again to confirm.
5. **+/-:** Press the buttons to move up/down the cursor (V) to your desired parameter, or press to increase/decrease the setting value.
6. **Reset:** Press the button to reset all setting back to factory default value.
7. **Exit:** To exit OSD.
8. **Video:** Press the button to select composite video input.
9. **SVideo:** Press the button to select SVideo input.

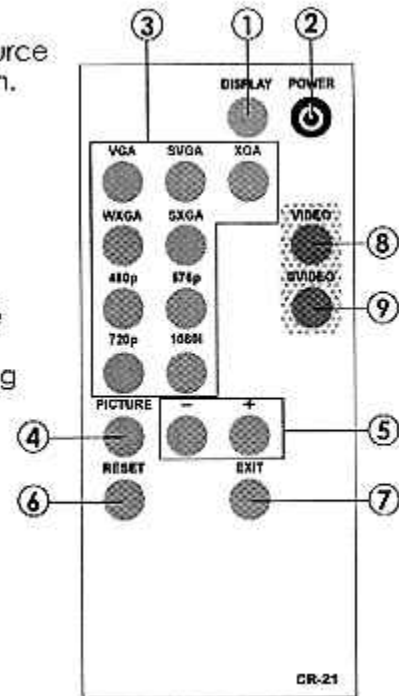

Specifications

Input signal levels	Video@1Vp-p, 75 ohm, Y@1 Vp-p, 75 ohm Color@ 0.7 Vp-p, 75 ohm
Output Format	Digital RGB
Output Connector	HDMI type A female
Output Signal	Bit stream
Weight	400 grams
Dimensions	125(W) x 123(D) x 30(H) mm

Output Signal Specifications

PC Resolutions	Vert Rate	Scan Type	Format
			Digital out Pin 1-19
VGA 640 X 480	60 Hz	Progressive	RGB
SVGA 800 X600	60 Hz	progressive	RGB
XGA 1024X768	60 Hz	Progressive	RGB
WXGA 1280X768	60 Hz	Progressive	RGB
SXGA 1280X1024	60 Hz	Progressive	RGB
HDTV Resolutions	Vert Rate	Scan Type	
480p 720 x 480	60 Hz	Progressive	RGB
576p 720 x 576	50 Hz	Progressive	RGB
720p 1280 x 720	60 Hz	Progressive	RGB
1080i <small>(pseudo)</small> 960x540p	60 Hz	Progressive	RGB

Installation

Digital Out: Connect to your TV through digital HDMI interface

