

HDMI Switch Selector

8 in 1 out - **ID# 707**



Operation Manual

Introduction


HDMI Switch Selector is a high performance HDMI switcher with remote control. It allows your various HDMI sources to share one HDTV display. Simply press a button to select your desired HDMI source to be displayed on the HDTV.

Features

1. HDMI 1.3, HDCP 1.1 and DVI 1.0 compliant.
2. Signal Enhancement feature allows you to improve signal quality after long distance transmission.
3. LED indicators.
4. Ideal for home theater integrations: * Supports input/output resolution:
pc: VGA, SVGA, XGA, SXGA, and UXGA (1600 x 1200) & WUXGA (1920x1200)
HDTV: 480i 576i 480p, 576p, 720p, 1080i and 1080p
5. Remote control & RS232 operation.
6. Easy to install and to operate.


Operating Functions and Controls

Front Panel

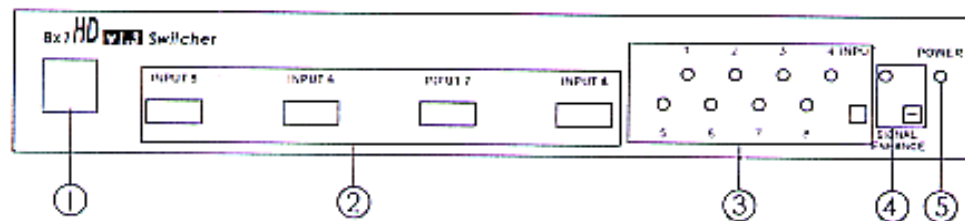

1. **Remote control sensor.**
2. **HDMI inputs:** Connect your various HDMI sources to each of the HDMI input of the unit using HDMI cables.
3. **Input select/Indicators:** Press the "INPUT" button repeatedly to switch to your desired input source and the LED will illuminate to indicate which input source is being selected.
4. **Signal Enhancement/Indicator:** Press the "Signal Enhance" button to turn on this feature to improve signal quality after long distance transmission. Press again to turn off. The LED will illuminate when the signal is enhanced.
5. **Power LED Indicator:** The LED will illuminate when the power is connected.

Rear Panel

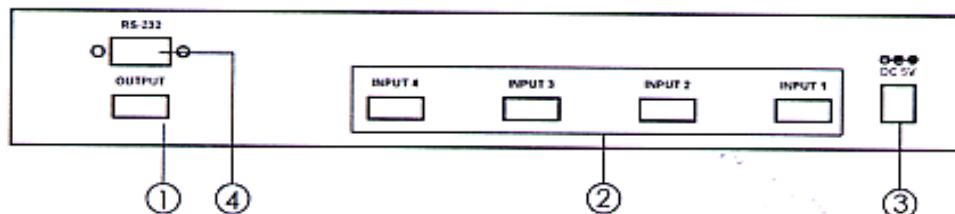


1. **HDMI output:** Connect the HDMI output to the HDMI input of your display using HDMI cable.

Remote Control

2. **HDMI inputs:** Connect your various HDMI sources to each of the HDMI input of the unit using HDMI cables.
3. **Power:** Plug the supplied 5VDC power supply into the unit.
4. **RS232:** 9-pin D-sub female connector for connecting to your other control console for remote control.

1. **Power:** Press the button to turn on/off the unit.
2. **Direct input selector:** Press numerical number button to select your desired input source.
3. **Void buttons (No function):** If the button number is greater than the total input number of the unit then the button is of no function.



Remote Control Protocol

Pins definition of modem cable

Splitter		Remote Controller	
PIN	Definition	PIN	Definition
1	NC	1	NC
2	TxD	2	RxD
3	RxD	3	TxD
4	NC	4	NC
5	GND	5	GND
6	NC	6	NC
7	NC	7	NC
8	NC	8	NC
9	NC	9	NC

RS-232 transmission format: Baud Rate : 9600 bps

Data Bit : 8 Bits

Parity: None

Stop Bit: 1 bit

RS-232 command

* The command is combined with a characters and digits.


*This combination command code has to be separated by ASCII character SPACE *The command will be executed after ASCII character "CR" input

* After ASCII character "CR" is entered, if the command is legal the unit will reply "OK" message

* If the command is illegal, The unit will reply "NG" message

Command Code	Comment
PORT 1	PORT 1 ON
PORT 2	PORT 2 ON
PORT 3	PORT 3 ON
PORT 4	PORT 4 ON
PORT 5	PORT 5 ON
PORT 6	PORT 6 ON
PORT 7	PORT 7 ON
PORT 8	PORT 8 ON
SIGNAL 1	ENABLE SIGNAL ENHANCE
SIGNAL 0	DISABLE SIGNAL ENHANCE
POWER 1	POWER ON
POWER 0	POWER OFF

Installation

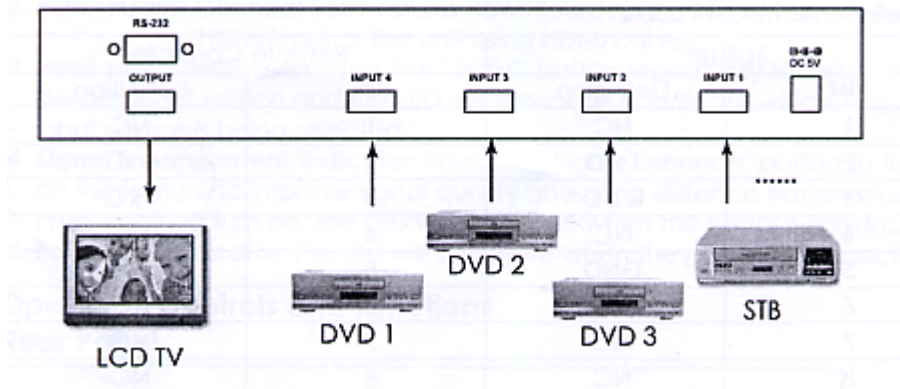

Specifications

-Frequency Band Width:	2.25 Gbps (single link)
Inputs:	8 x HDMI female port (Type A connector)
Output:	1 x HDMI female port (Type A connector)
-Power Supply:	5V DC
Weight(g):	850
-Dimensions(mm):	280(W) x 104(L) x 44(H)
-Silkscreen Color:	Black
-Operating Temperature:	0°C-40°C