

3G-SDI 1 by 4 splitter

- ID# 697



Operation Manual

Introduction

The 3G-SDI 1 by 4 Splitter allows SD-SDI, HD-SDI and 3G-SDI signals to be shown on SDI display while ensuring high bit rates of 2.970 Gbit/s to give you fast signal transmission without signal loss. For professionals this means that it is now easier to Splitter a 3G-SDI signals up to four SDI signal outputs.

Applications

- Video broadcasting display
- Professional video program display
- Film studios program monitoring
- Video program switching display

System Requirements

Input connects with SDI sources and output connects with SDI displays, all input/output with SDI cables.


Features

- One 3G-SDI input sources can split to four 3G-SDI displays simultaneously
- Operation at 2.970Gb/s, 2.970/1.001Gb/s, 1.485Gb/s, 1.485/1.001Gb/s and 270Mb/s
- Supports SMPTE 425M (Level A and Level B), SMPTE 424M, SMPTE 292M, SMPTE 259M-C
- Provides the Equalized and re-clocked transmission
- Supports signal input and output distance of up to 300M for SD signals, 200M for HD signals and 100M for 3G signals.

Note: Cable tested with Belden 1694A. Operating distances may vary if used with another type of cable.

Operating Functions and Controls

Front Panel

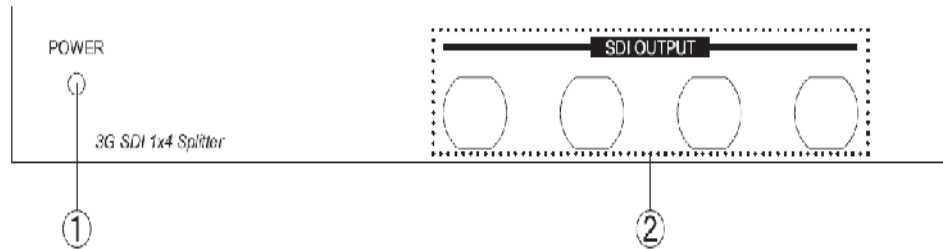

① **Power LED:** This green LED will illuminate when the device is connected with power supply.

② **SDI OUTPUT:** These slots are to connect to the SDI displays with an SDI cables for displaying images. Or it can be connect with another SDI converter/extender to extend the signal.


Rear Panel



① **SDI INPUT:** This slot is to connect to the SDI source equipment such as video camcorder or SDI player.

② **DC 5V:** Plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet. Green LED will illuminate when the power is connected.

Connection

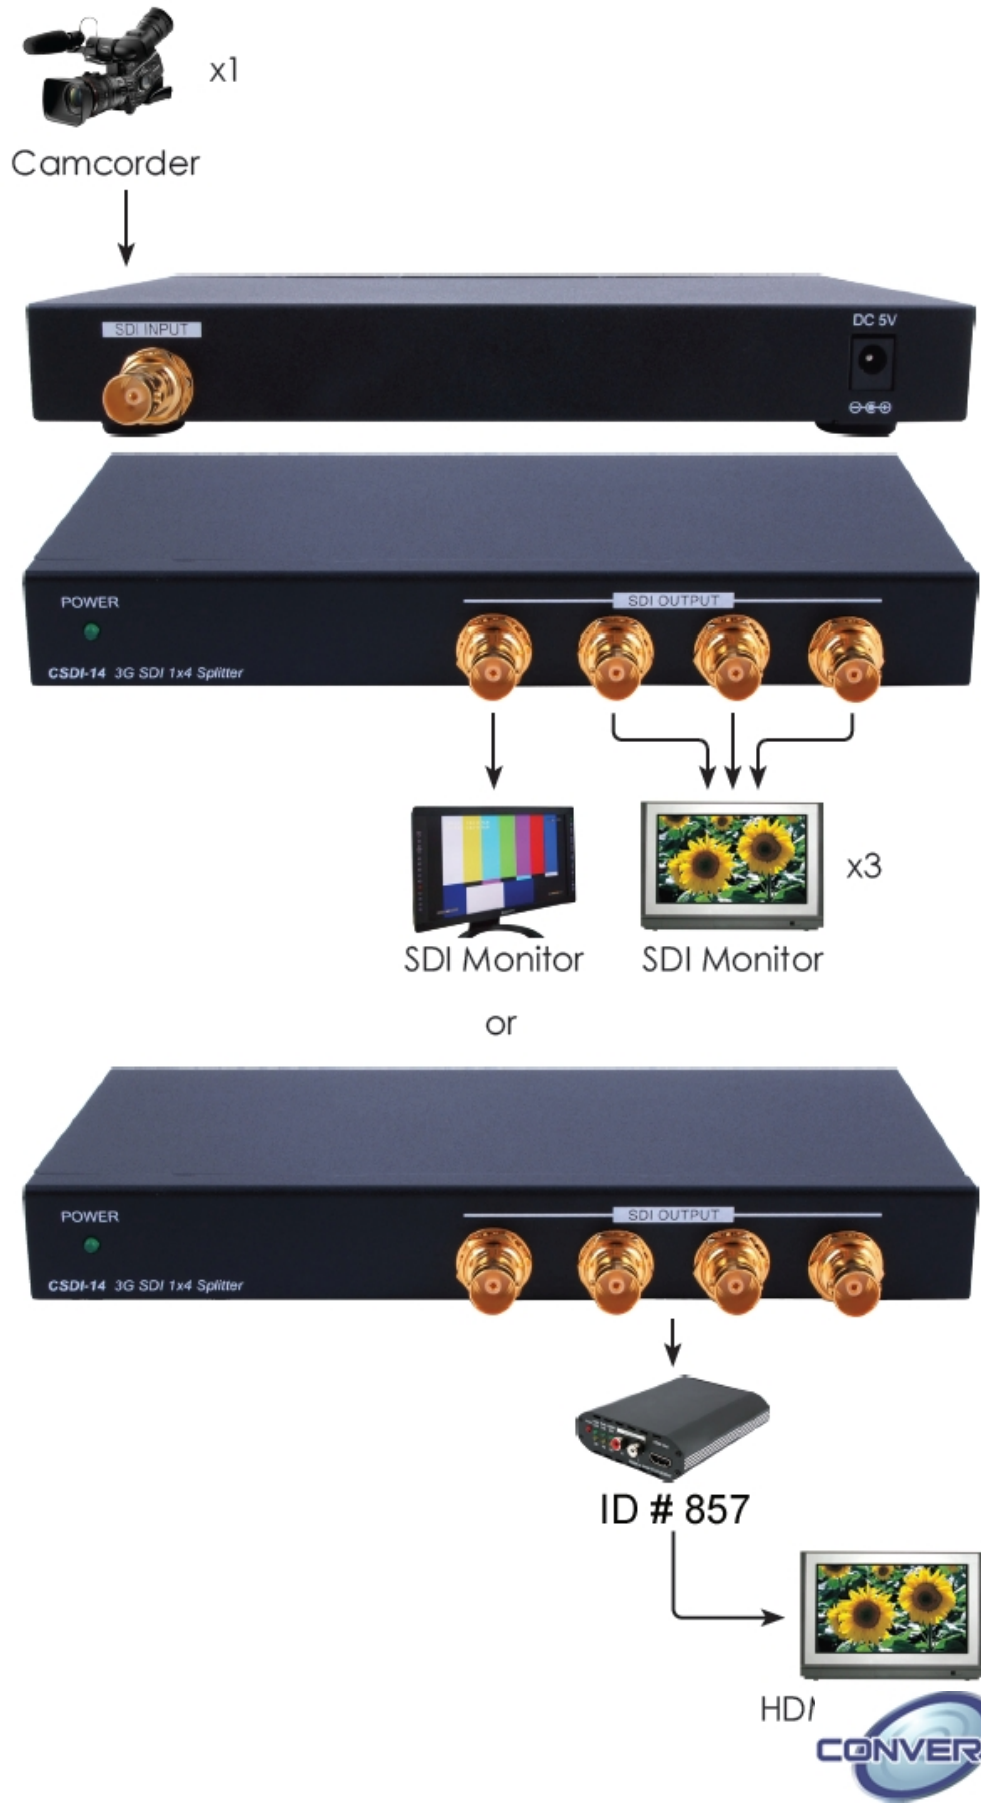

Specifications

SMPTE Standard	425M Level A & B, 424M, 292M, 259M-C
SDI Transmission Rates	2.970 Gbit/s and 2.970/1.001 Gbit/s
Input/Output Ports	1/4 BNC (SD-SDI/HD-SDI/3G-SDI)
Support Timing	SD-SDI: 480i / 576i HD-SDI: 720p@50/60, 1080i@50/60, 1080p@24/253 G-SDI: 1080p@50/60
Power Supply	5V DC/ 2.6A (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: ± 8kV (air-gap discharge) ± 4kV (contact discharge)
SDI Cable Distance	3G-SDI up to 100M (BELDEN 1694A) HD-SDI up to 200M (BELDEN 1694A) SD-SDI up to 300M (BELDEN 1694A)
Dimension (mm)	200 (W) x 138 (D) x 30 (H)
Weight (g)	900
Chassis Material	Metal
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20 ~ 90% RH (Non-condensing)
Power Consumption (W)	5W